


DP CURRENT TRANSFORMERS

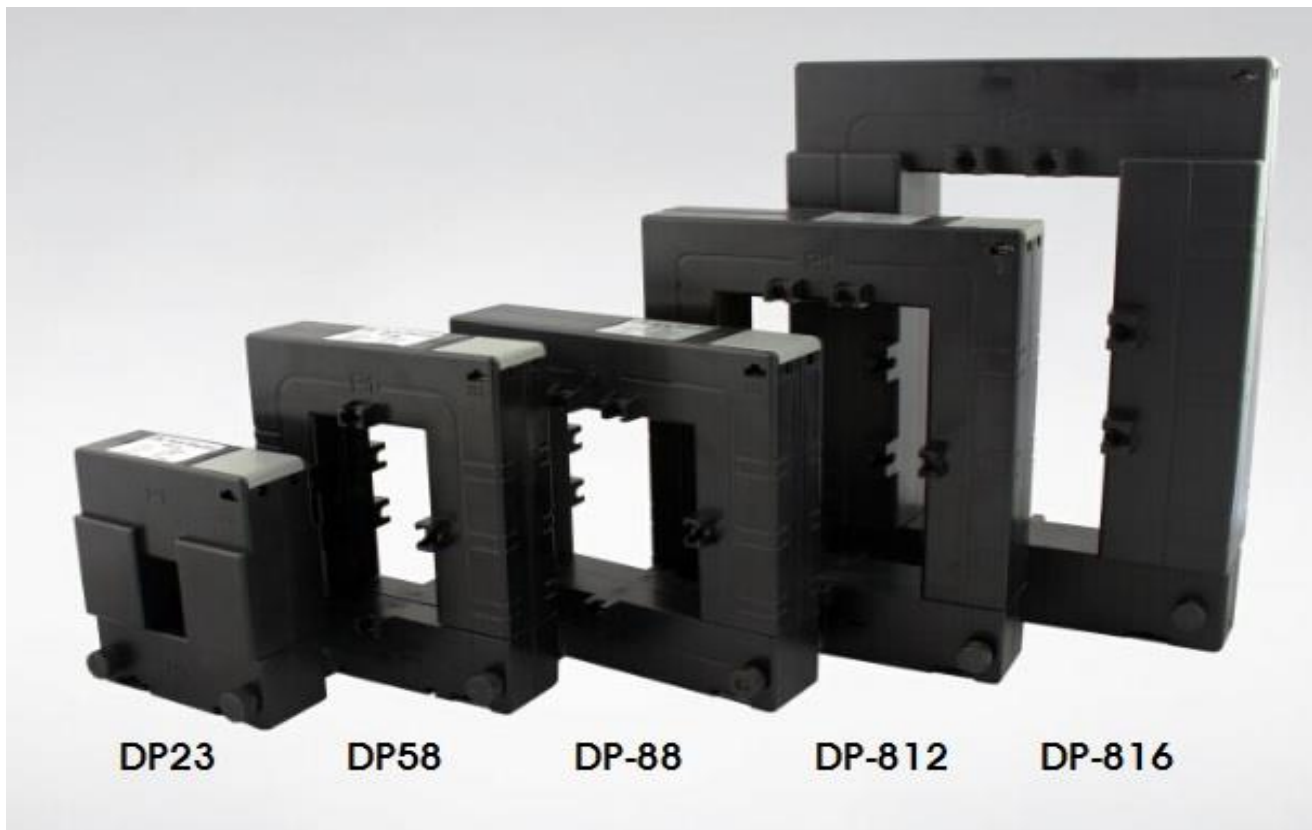

Split core current transformers DP series:

The DP series of current transformers have been especially designed to facilitate their installation in new or already existing networks. They may be installed without opening any cable or bus bar circuit. The connection of conventional CT's usually requires the interruption of the primary side circuit to pass cables or bus bars through the transformer core or to connect such cables to the primary terminals. The DP series transformers core may be easily opened and they may be installed and connected without any supply interruption, thus saving time and installation costs.

The main features of DP transformers are:

- Small size and easy mounting
- Wide inner window, allowing clamping of big cables or bus bars
- wide range of sizes to accommodate all the existing installations
- High accuracy and reliability

Split core current transformers DP series:

Primary current: 100A-5000A

Secondary current: 5A, 1A

Standard approval: IEC44-1, BS7626, VDE0414, VL94

Maximum voltage: 0.72/3kV

Frequency: 50Hz

Rated Load: 1VA-30VA



Class: 0.5,1.0,

Short-time thermal current: $I_{th}=100 \times I_n$

Rated security coefficient $F_s < 5$

Dimension (Unit : mm)

Model	A	B	C	D	E	F	G	H	I	Weight (kg)
DP-23	20	30	51	89	111	34	47	40	32	0.75
DP-58	50	80	78	114	145	32	32	32	33	0.9
DP-88	80	80	108	144	145	32	32	32	33	1.05
DP-812	80	120	108	144	185	32	32	32	33	1.25
DP-816	80	160	120	184	245	52	47	52	38	4.30

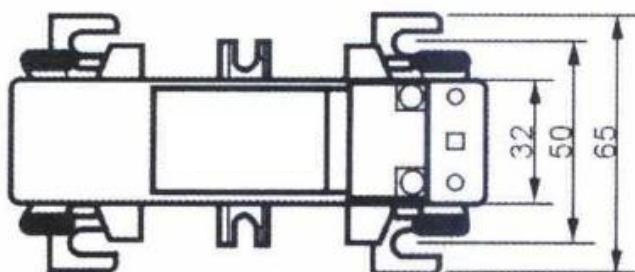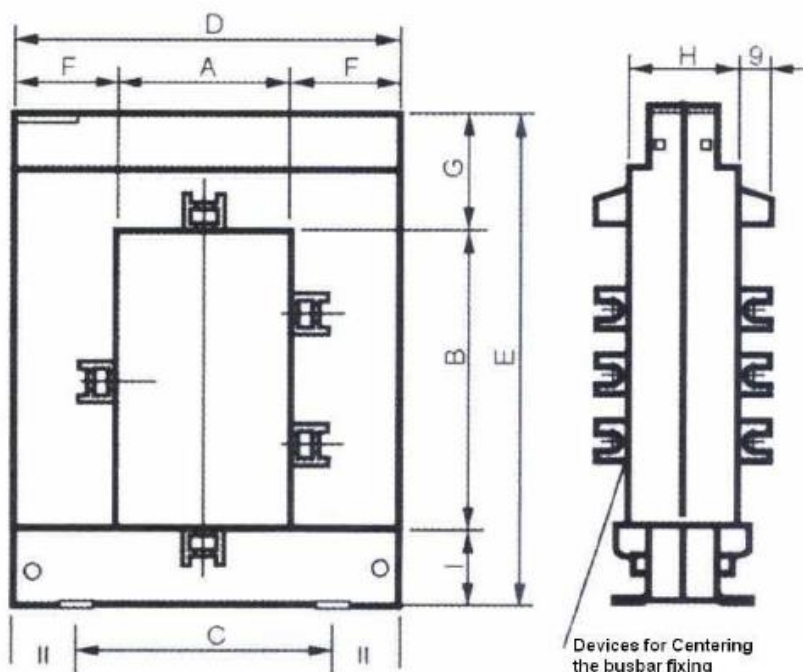

Model	Nominal Current Ratio	Burden VA	
		Class 0.5	Class:1
		VA	
DP-23	100/5A	x	1.5
	150/5A	x	1.5
	200/5A	x	1.5
	250/5A	x	1.5
	300/5A	1.5	3.75
	400/5A	2.5	5.0
DP-58	250/5A	1.0	1.5
	300/5A	1.5	2.5
	400/5A	2.5	3.0
	500/5A	2.5	5.0
	600/5A	2.5	5.0
	750/5A	2.5	5.0
	800/5A	2.5	7.5
	1000/5A	5.0	10.0
DP-88	250/5A	1.0	2.0
	300/5A	1.5	2.5
	400/5A	1.5	2.5
	500/5A	2.5	5.0
	600/5A	2.5	5.0
	750/5A	2.5	5.0
	800/5A	2.5	7.5
	1000/5A	5.0	10.0
DP-812	500/5A	x	4.0
	600/5A	x	5.0
	750/5A	2.5	6.0
	800/5A	2.5	7.5
	1000/5A	5.0	10.0
	1200/5A	5.0	12.5
	1250/5A	7.5	15.0
	1500/5A	7.5	17.0
	1600/5A	10.0	20.0
	2000/5A	10.0	20.0
DP-816	2500/5A	15.0	20.0
	3000/5A	20.0	20.0
	1000/5A	10.0	15.0
	1500/5A	15.0	20.0
	2000/5A	15.0	20.0
	2500/5A	15.0	20.0
	3000/5A	20.0	25.0

WINLING TECHNOLOGY LTD.,

4F.-5, No.6, Ln.609, Sec.5, Chongxin Rd.,
San-chong City, New Taipei City 24159, Taiwan
Tel: 886-2-29996610 Fax: 886-2-29996620

winling@winling.com.tw www.winling.com.tw