

微電腦型單相交流集合式電錶(單相二線系統)

(MICROPROCESS AC MULTI-POWER METER)(1Ø2W)

MODEL
WLMMX-P1



■特點(FEATURES)



- 精確度0.25%滿刻度 ±1位數(Accuracy 0.25% F.S. ±1 digit)(ACA/ACV/WATT/VA)
- 可同時量測與顯示交流電壓,電流,頻率,瓦特,(功率因數/視在功率)
(Measuring ACA/ACV/Frequency/WATT(power factor or Apparent power))
- 電壓,電流,瓦特皆為真正有效值(TRMS)(ACA/ACV/WATT for True RMS)
- 交流電流,瓦特之小數點可任意設定(ACA/WATT decimal point can be modified)
- 瓦特單位W或KW可任意設定(W or KW scale can be modified)
- CT比可任意設定(1至999)(CT rate can be modified(1 to 999))
- 數位RS-485界面(Digit RS-485 interface function)(Optional)
- RS-485通訊界面為Modbus RTU模式(RS-485 protocol for Modbus RTU mode)
- RS-485傳輸速率19200/9600/4800/2400可任意設定(RS-485 baud rate 19200/9600/4800/2400)
- 輸入與輸出絕緣耐壓 2仟伏特/1分鐘(Dielectric strength 2KVac/1 min.(input/output/power))
- 突波測試強度4仟伏特(1.2x50us)(surage test 4KV(1.2x50us))

3.OUTSIDE DIMENSION AND CONNECTION DIAGRAM (外型尺寸與開孔尺寸與配線圖)

WLMMX-P1- 選購型號							
NO	Input Voltage	NO	Input Current	NO	RS-485	NO	Aux Power
1	AC0~300.0V	2	AC0~5A	N	None	A	AC/DC18-60V
2	AC0~600.0V	3	AC0~50A	Y	RS-485	B	AC/DC90-260V
9	SPECIFIED	9	SPECIFIED	.Modbus mode		.Less 5VA for AC/DC input	

2.SPECIFICATION(主要規格)

- Measuring accuracy (精確度) (23 ±5) : 0.1% F.S. ±1 digit (Frequency)
0.25% F.S. ±1 digit(ACA,ACV,Watt,VA)
0.25% F.S. ±0.25%(Power Factor)
(-.300~+.300)
- Input burden (輸入負載) : <0.2VA (Voltage)
<0.2VA (Current)
- Maximum input over (最大過載能力) : Current related input: 3 x rated continuous
10 x rated 30 sec. 25 x rated 3sec.
50 x rated 1sec.
Voltage related input: maximum 2 x rated continuous
- Over input indication (過載顯示) : "doFL"
- Readout range (顯示值範圍) : 0~600.0V(Voltage)
0~999.9Hz(Frequency)(<20% for voltage input)
0~19999 digit adjustable(Current,Watt,VA)
- Sampling time (取樣時間) : 2 cycles/sec.
- RS-485 address (通訊位址) : "01"-"FF"
- RS-485 baud rate (傳輸速度) : 19200/9600/4800/2400 selective
- RS-485 protocol (通信協議) : Modbus RTU mode
- Temp. coefficient (溫度係數) : 100ppm/ (0-50)
- Display (顯示幕) : Red high efficiency LEDs high 10.16 mm(0.4")
- Parameter setting (參數設定方式) : Touch switches
- Memory mode (記憶型式) : Non-volatile E² PROM memory
- Insulation Resistance (絕緣阻抗) : >100Mohm with 500V DC
- Dielectric strength (絕緣耐壓能力) : 2KVac/1 min. (input/output/power)
1600 Vdc (input/output)
- Surge test (突波測試) : ANSI c37.90a/1974,DIN-IEC 255-4
impulse voltage 4KV(1.2x50us)
- Operating condition (使用環境條件) : 0-50 (20 to 90% RH non-condensed)
- Storage condition (存放環境條件) : 0-70 (20 to 90% RH non-condensed)

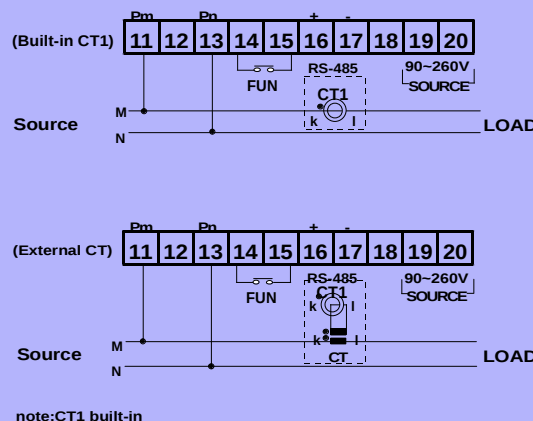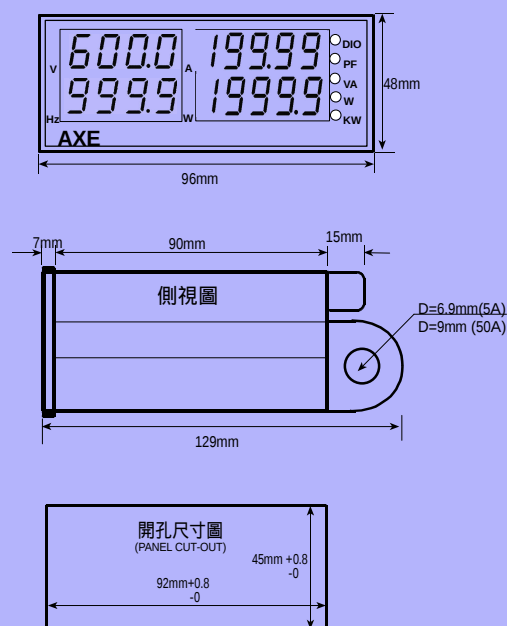

偉菱科技有限公司 (WINLING TECHNOLOGY LTD)
241台北縣三重市重新路5段572號12樓
TEL:02-29957702 FAX:02-29957825
WEB: <http://www.winling.com.tw>
E-mail: win.ling@msa.hinet.net