

直流信號隔離雙輸出傳送器

(DUAL OUTPUT DC SIGNAL ISOLATED TRANSMITTER)

MODEL
TDD



■特點(FEATURES)

- 精確度 0.2% 滿刻度 (Accuracy 0.2% F.S.)
- 多種輸入輸出選擇 (Wide selection of input/output range)
- 輸入與輸出1/輸出2絕緣耐壓 2千伏特/1分鐘 (Dielectric strength 2KVac/1 min. (input/output1/output2))
- 寬範圍交直流兩用電源設計 (Wide input range for auxiliary power)
- 尺寸小,穩定性高 (Dimension small & High stability)

1. Model: TDD


(選購型號)

NO	Input Range	NO	Input Range	NO	Output 1 Range	NO	Output 2 Range	NO	Aux. Power
1	0~50mV	6	4~20mA	C	1~5V	C	1~5V	A	DC24V
2	0~1V	7	4~20mA	D	0~10V	D	0~10V	B	AC85-265V
3	0~5V	9	SPECIFIED	F	0~1mA	F	0~1mA	DC24V, ≤2.0W	
4	1~5V	● Exciting DC24V(<25mA) (two-wire transmitter)		I	4~20mA	I	4~20mA		
5	0~10V			R	SPECIFIED	R	SPECIFIED		

2. SPECIFICATION (主要規格)

- Measuring accuracy (精確度) : 0.2% F.S. (23±5°C)
- Input resistance (輸入阻抗) : >100Mohm (<2V range)
>2Mohm (>2V range)
<100 ohm (current input)
- Maximum input (最大過載能力) : <600Vrms (>2V ranges)
<150Vrms (<2V ranges)
<150mA (current ranges)
- Response time (輸出反應時間) : <250ms (0~90%)
- Output drive capability (輸出負載能力) : <10mA for voltage mode
<10V for current mode
- Output ripple(p-p) (輸出漣波) : <0.1% F.S.
- Zero (offset) range (歸零調整範圍) : 0~±5% F.S.
- Span (scale) range (最大值調整範圍) : 0~±10% F.S.
- Temp. coefficient (溫度係數) : 100ppm/°C (0~50°C)
- Isolation (隔離特性) : Input/Output1/Output2/Power/Case
- Insulation Resistance (絕緣阻抗) : >100M ohm with 500V DC
- Dielectric strength (絕緣耐壓能力) : 2KVac/1 min. (input/output1/output2/power)
1600Vdc (input/output)
- Operating condition (使用環境條件) : 0~60°C (20 to 90% RH non-condensed)
- Storage condition (存放環境條件) : 0~70°C (20 to 90% RH non-condensed)
- Construction (安裝方式) : Socket/plugin type with barrier terminals

3. TERMINAL CONNECTION (接線圖)

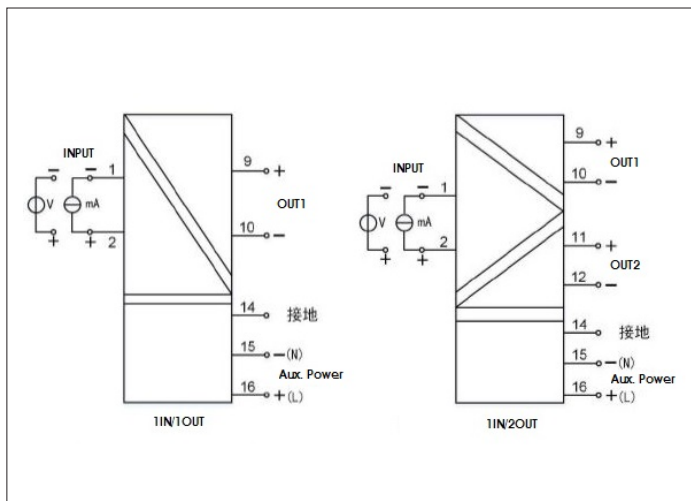

4. DIMENSION(unit:mm) (外型尺寸)

